


Emergency Conversionkit

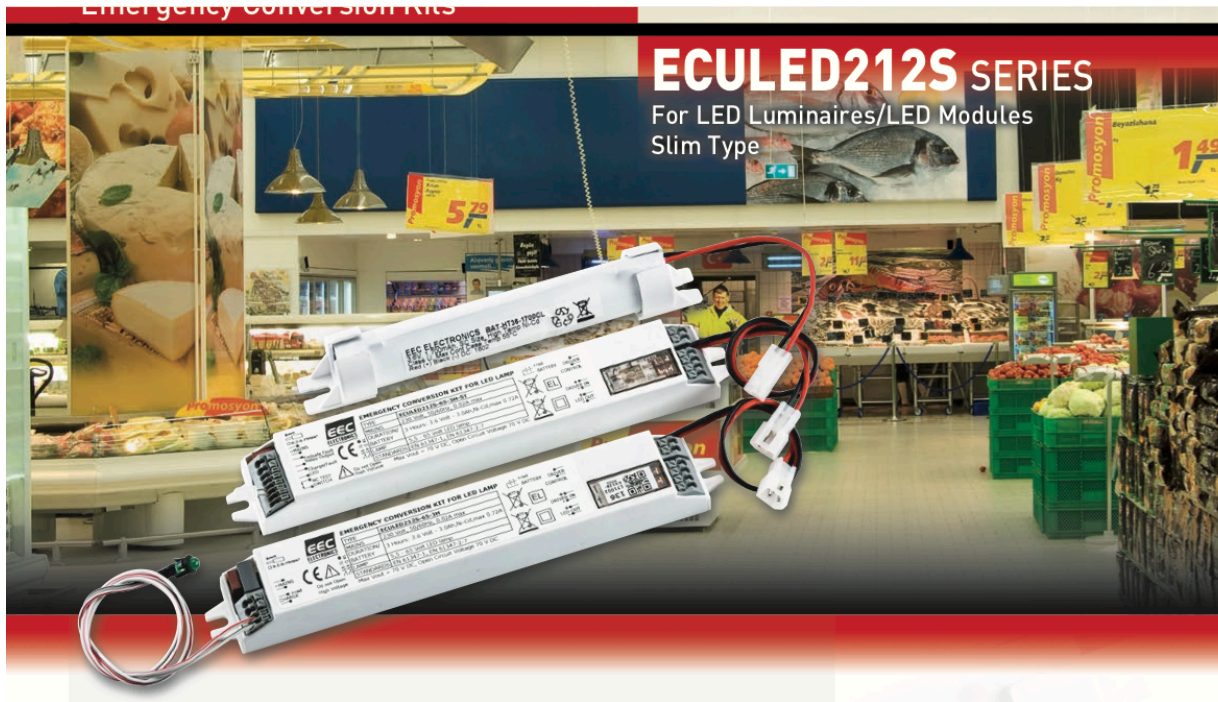

When the mains power is ON, the luminaire will suit the position of the wall switch and will be lit through its own driver. In case of mains failure the ECULED212S will drive the LED fitting through its battery and not depending on the wall switch position.


General Specifications

- Slim type
- Suitable for "Current Controlled LED Drivers"
- Non-maintained operating mode
- 1 or 3 hours emergency duration
- Class II (no earth wiring required)
- High temperature type Ni-Cd & Ni-MH batteries
- Eco, Self-Test & DALI models
- Easy installation
- Very long life
- Manufactured to comply with EN61347 Series

Technical Specifications

Input : 230 Volt AC, 50/60 Hz, max 0,025A
 Power Consumption : max 5VA
 Operating Mode : Non-maintained
 Luminaire : LED light source
 Battery : High Temp Ni-Cd & Ni-MH batteries
 Emergency Duration : 1 or 3 hours
 Charge Indicator : Green LED lamp
 Fault Indicator : Red LED lamp (ST & DALI models)
 Output Voltage : Refer to table
 Insulation Class : Class II (no earth wiring required)
 Protection Class : IP20
 Temperature : ta 0-45°C, tc 95°C
 Terminals : 0.2 to 1.5mm² quick fit terminal block
 Enclosure : White thermoplastic housing

Dimensions (mm)



Ordering Details

Code	Type	Output	Duration	Battery
ECULED212S-65E-1H	ECO	6 - 65 Volt	1 hour	3.6V - 0.8Ah
ECULED212S-65E-3H			3 hours	3.6V - 1.7Ah
ECULED212S-65-1H			1 hour	3.6V - 1.7Ah
ECULED212S-65-3H			3 hours	3.6V - 3.0Ah
ECULED212S-250E-1H			1 hour	3.6V - 0.8Ah
ECULED212S-250E-3H			3 hours	3.6V - 1.7Ah
ECULED212S-250-1H	SELF TEST	30- 250 Volt	1 hour	3.6V - 1.7Ah
ECULED212S-250-3H			3 hours	3.6V - 3.0Ah
ECULED212S-65E-ST-3H-MH			3 hours	3.6V - 1.5Ah
ECULED212S-65E-ST-3H			3 hours	3.6V - 3.0Ah
ECULED212S-65H-ST-3H-MH			3 hours	3.6V - 4.0Ah
ECULED212S-250E-ST-3H-MH			3 hours	3.6V - 1.5Ah
ECULED212S-250-ST-3H	DALI	30- 250 Volt	3 hours	3.6V - 3.0Ah
ECULED212S-250H-ST-3H-MH			3 hours	3.6V - 4.0Ah
ECULED212S-65E-DALI-3H-MH			3 hours	3.6V - 1.5Ah
ECULED212S-65-DALI-3H			3 hours	3.6V - 3.0Ah
ECULED212S-65H-DALI-3H-MH			3 hours	3.6V - 4.0Ah
ECULED212S-250E-DALI-3H-MH			3 hours	3.6V - 1.5Ah
ECULED212S-250-DALI-3H	30- 250 Volt	30- 250 Volt	3 hours	3.6V - 3.0Ah
ECULED212S-250H-DALI-3H-MH			3 hours	3.6V - 4.0Ah

(*) Special requests are available

Dimensions (mm)



Battery		ØDxL	a	b	c	d
3.6V - 0.8Ah	Ni-Cd	15x150	12	18	16	6
3.6V - 1.7Ah	Ni-Cd	23x130	17	27	27	14
3.6V - 3.0Ah	Ni-Cd	26x150	19	30	30	8
3.6V - 4.0Ah	Ni-MH	19x 285	-	-	-	-

(*) Special type & configurations are available

Meer info ?

Project Zero

Windhoek 29 - 8790 Waregem
 T +32 56 711 501
 E sales@project-zero.be
 www.PROJECT-ZERO.be