

TCL Solar Half Cut N-type Bifacial Double Glass Module

HSM-ND48-DR430~450
G12R-48P

450W

Maximum Power Output

22.5%

Maximum Efficiency



Aesthetic Experience

- For RES scenarios, delivering aesthetic experience
- Full black module for uniform rooftop integration



Reliable and convenient to install

- Rigorous material selection
- High-strength frame and heat strengthened glass
- Easier handling and installation



High Energy Yield

- Excellent thermal resistance and temperature coefficient
- Outstanding power generation performance


Linear Performance Warranty



25 Years
Product Warranty



30 Years Linear
Performance Warranty

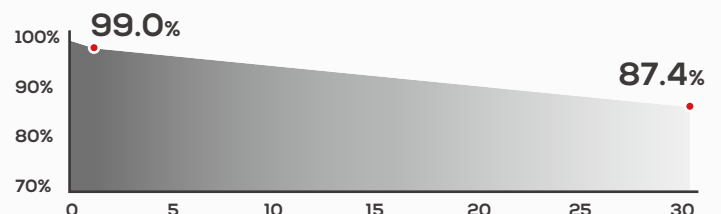

Comprehensive Products and System Certificates



IEC 61215 / IEC 61730 ISO 9001:2015 ISO 45001:2018 ISO 14001:2015

Measurement Tolerance: Pmax (W) $\pm 3\%$; Voc (V) $\pm 3\%$; Isc (A) $\pm 4\%$ * STC: Irradiance 1000W/m², Cell Temperature 25°C, AM1.5, Measurement Tolerance: $\pm 2\%$ * BNPI: Back Irradiance 135W/m², Cell temperature 25°C, Atmospheric quality AM 1.5G, Wind speed 1m/s

Electrical Parameters (STC* & BNPI*)

Testing Condition		STC		BNPI		STC		BNPI		STC		BNPI		STC		BNPI	
Maximum Power	Pmax (W)	430	471	435	477	440	482	445	488	450	493	455	496	460	500	465	503
Open Circuit Voltage	Voc (V)	34.76	34.98	34.96	35.21	35.16	35.39	35.36	35.61	35.56	35.80	35.53	35.78	35.48	35.73	35.45	35.70
Short Circuit Current	Isc (A)	15.78	17.18	15.85	17.26	15.92	17.33	15.99	17.42	16.06	17.48	16.13	17.55	16.20	17.62	16.27	17.69
Maximum Power Voltage	Vmp (V)	29.34	29.43	29.54	29.66	29.74	29.84	29.93	30.06	30.13	30.24	30.20	30.33	30.07	30.20	30.14	30.27
Maximum Power Current	Imp (A)	14.66	16.01	14.73	16.09	14.80	16.16	14.87	16.24	14.94	16.31	15.01	16.38	15.08	16.45	15.15	16.52
Module Efficiency	(%)	21.5		21.8		22.0		22.3		22.5		22.8		23.0		23.3	

Electrical Characteristics with Different Bifacial Gain*

* The additional gain from the back side depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.

Bifacial Gain		5%		10%		5%		10%		5%		10%		5%		10%	
Maximum Power	Pmax (W)	452	473	457	479	462	484	467	490	473	495	478	500	484	506	489	511
Open Circuit Voltage	Voc (V)	34.76	34.76	34.96	34.96	35.16	35.16	35.36	35.36	35.56	35.56	35.76	35.76	35.96	35.96	36.16	36.16
Short Circuit Current	Isc (A)	16.57	17.36	16.64	17.44	16.72	17.51	16.79	17.59	16.86	17.67	16.94	17.75	17.01	17.82	17.08	17.89
Maximum Power Voltage	Vmp (V)	29.34	29.34	29.54	29.54	29.74	29.74	29.93	29.93	30.13	30.13	30.33	30.33	30.53	30.53	30.73	30.73
Maximum Power Current	Imp (A)	15.39	16.13	15.47	16.20	15.54	16.28	15.61	16.36	15.69	16.43	15.76	16.50	15.83	16.57	15.90	16.64

Temperature Coefficient

Nominal Module Operating Temperature*	43 $\pm$ 2°C
Temperature Coefficient of Isc	+0.045%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.29%/°C

Operating Parameters

Operating Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A
Power Bifaciality	80 $\pm$ 10%

Mechanical Data


* Please refer to installation manual for details

No. of Cells	96pcs (6 $\times$ 16)
Dimension	1762 $\times$ 1134 $\times$ 30 mm
Weight	24.5kg $\pm$ 3%
Front Glass	2.0mm, Heat Strengthened, AR coating Glass
Back Glass	2.0mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
J-Box	IP68, three diodes
Cables	4.0mm ² , +1200mm, -1200mm (can be customized)
Maximum Static Load	Front: 5400Pa/Back: 2400Pa*
Fire Rating	IEC Class C
Connectors:	Staubli Electrical Connectors AG, PV-KST4-EVO 2/xy_UR; PV-KBT4-EVO 2xy/_UR

Packaging Configuration

Modules per Pallet	36pcs
Modules per 40'HQ Container	936pcs
Pallets per 40'HQ Container	26pcs

Curve Graph

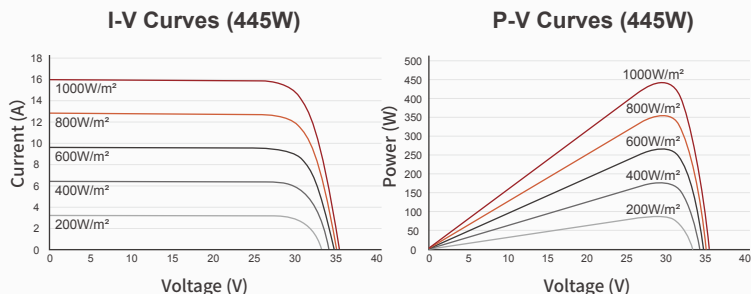

Engineering Drawing

[Unit: mm]

