
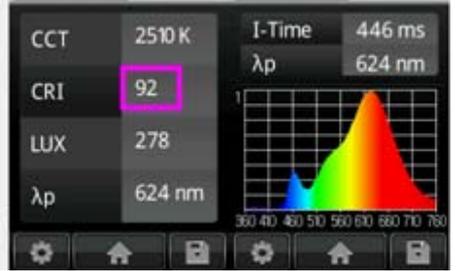


Specification Sheet for No Spot LED Flexible Strips

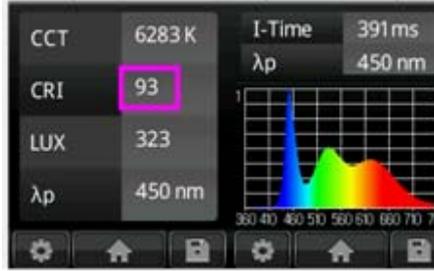

Applications:


- ◆ Car decoration
- ◆ Architectural decorative lighting
- ◆ Archway, canopy and bridge edge lighting
- ◆ Auditorium walkway lighting
- ◆ Backlighting for signage letters
- ◆ Channel letter lighting

Product features:

- ◆ Various angle 120degrees
- ◆ With adhesive tape on backside
- ◆ Made of high quality LEDs
- ◆ Work Voltage: DC24V version
- ◆ No Light Spot
- ◆ UL, CUL, CE, ROHS Approved




Dimensions Drawing of 300LED/m Version

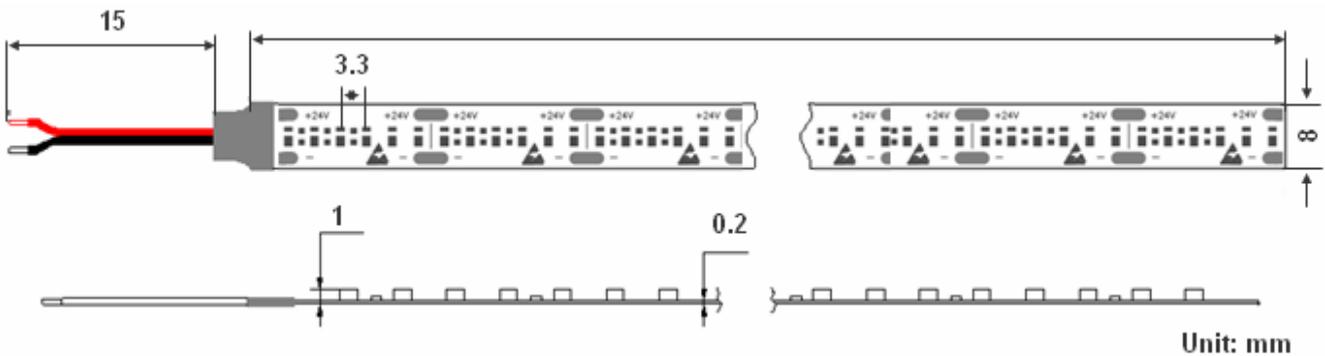

Specifications

Model No.	Color	LED Qty	λ(Nm)/(CT:K)	Luminous Flux (lm/m)	PCB Size (mm)	Work Voltage	Power	Water proof	Packing
CRI ≥ 90 Version									
F2216C150SA-W-24-M	☐ Warm White	SMD2216 300LED/m	2500-2600K	500-600	8mm	DC24V	12W/m	IP67	5m/reel
F2216C150SA-N-24-M	☐ Nature White		3400-3500K	600-650					
F2216C150SA-P-24-M	☐ Pure White		5000-5200K	650-700					

Connection drawings

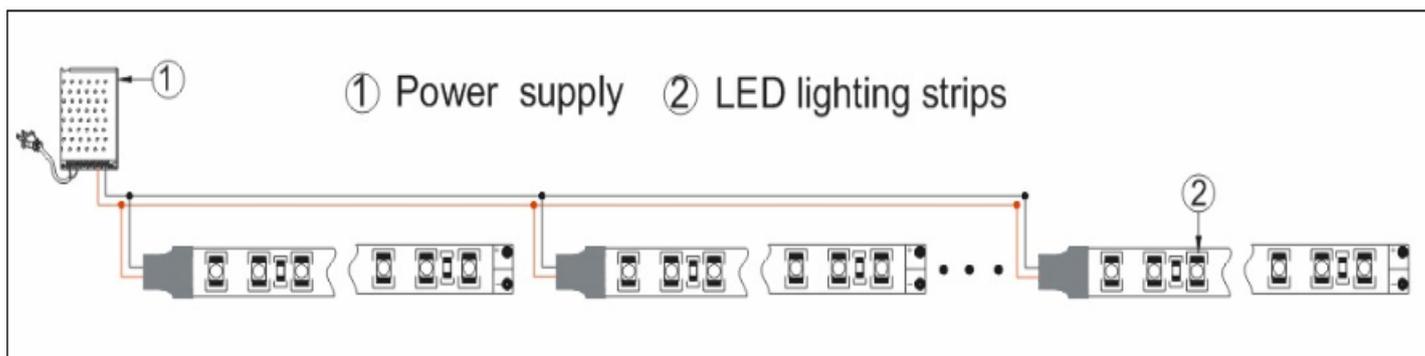

Notice:

Before application, please make sure the power supply is in accordance to the strips